


CIGARETTE BURN REPAIR

10 steps: to successfully repairing a cigarette burn in a leather chesterfield.



- Step 1: Clean area with [TLC Leather Cleaner](#)
- Step 2: Wipe down with Alcohol Cleaner
- Step 3: Use a small grinder to remove the hard burnt bits of leather.
- Step 4: Insert sub patch behind the hole.

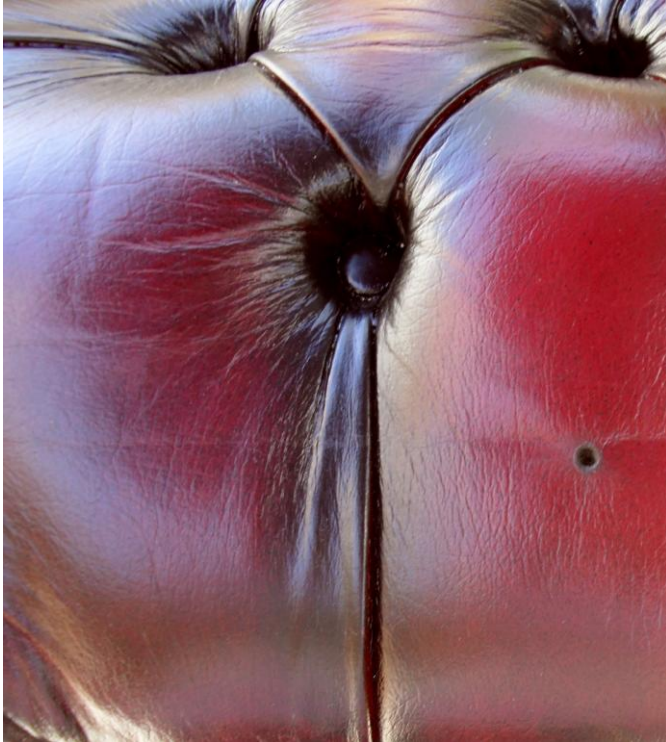

SUB PATCH APPLIED 1

Step 5: Apply filler in 3 or 4 thin layers to just below surface. (Dry with hair drier each layer)

Step 6: Lightly sand the area.



HOLE FILLED 1

Step 7: Apply final heat cured filler to slightly proud of surface.


Step 8: Put graining pad over filler and then apply heat iron for 2 mins.

Step 9: Lightly sand if required, and then colour the filler the same as the base colour red.

Step 10: Very lightly over spray with dark red or black, to blend in with surrounding area. Then use a leather finish, (Gloss in this case) to seal in the colour.



REPAIR COMPLETE 1

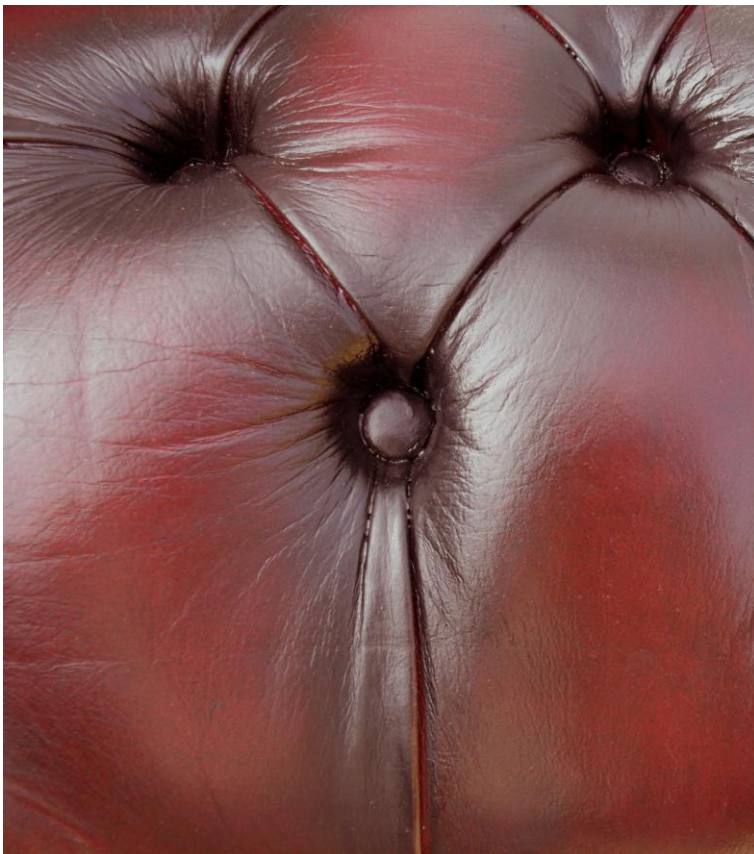

The finished job!

When thoroughly dry, apply [TLC Leather Protector](#) to the whole area to give a full protection and enhance the finish,